

## T12 / Luxline Plus

F20W/54-765 RS

0001559



### Range features



### PRODUCT OVERVIEW

Light colour	865 Daylight
Ordering number	0001559
Technology	Fluorescent
Lamp shape	Tubular
Lamp finish	Coated
Dimmable	Yes
Cap/Base	G13
Type	T12
EAN code	5410288015590
CRI (Ra)	72
Colour temperature (K)	6500
Luminous flux (Rated) (lm)	1050
Watt (Nominal) (W)	20
Voltage (V)	57

## T12 / Luxline Plus

F20W/54-765 RS

0001559

### DATA TABLE

#### General data

Ordering number	0001559
Technology	Fluorescent
Average life (Nominal) (h)	10000
Lamp finish	Coated
Lamp shape	Tubular
Dimmable	Yes
Cap/Base	G13
Type	T12
EAN code	5410288015590
E-number SE	8356716
E-number FI	4940120
Market restrictions	Not for sale in the EU
Product name	F20W/54-765 RS
Lamp mercury content (mg)	9
Control gear required	Yes
Fixture rating	Open
IEC Reference	IEC 60081
IEC Reference 2	IEC 61195
Intended purpose	General lighting
Special purpose lamp	No
Transformer required	No
Sales pack quantity	25

#### Optical data

Light colour	865 Daylight
CRI (Ra)	72
Colour temperature (K)	6500
Luminous flux (Rated) (lm)	1050
Luminous flux (Nominal) (lm)	1050
Ambient temperature for maximum luminous flux (°C)	25

#### Electrical data

Watt (Rated) (W)	19.3
Watt (Nominal) (W)	20
Voltage (V)	57
Current (A)	0.37

# T12 / Luxline Plus

F20W/54-765 RS

**0001559**

## Physical data


<b>Weight (kg)</b>	0.14
<b>Length base to base (mm) - A</b>	589.8
<b>Length base to pin Min-Max - B</b>	594.5-596.9
<b>Max overall length (mm)</b>	604
<b>Lamp Diameter (mm) - D</b>	38
<b>Packaging outer length (cm)</b>	63.00
<b>Packaging outer height (cm)</b>	21.00
<b>Packaging outer width (cm)</b>	22.00
<b>Packaging single width (cm)</b>	4.30
<b>Packaging single length (cm)</b>	60.30
<b>Packaging single height (cm)</b>	4.10

## T12 / Luxline Plus

F20W/54-765 RS

0001559

### PHOTOMETRY

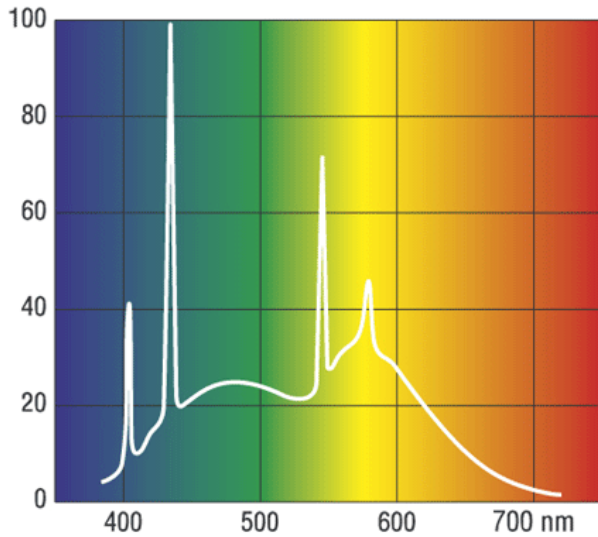

$x = 0.313$   
 $y = 0.337$

CRI (Ra) = 75  
Tc = 6500K

### TECHNICAL DRAWINGS

