

Aquastar T8

F25W/30/Aquastar

0002226



Range features

- Light colour: 10000 Kelvin (simulating the tropical light spectrum)
- Promotes the growth of coral and aquatic plants through natural red and blue sections of the light spectrum
- Excellent lighting performance
- Applications
- For all biological organisms in fresh and marine water aquariums



PRODUCT OVERVIEW

Ordering number	0002226
Lamp shape	Tubular
Lamp finish	Coated
Dimmable	Yes
Cap/Base	G13
Type	AquaStar
EAN code	5410288022260
Colour temperature (K)	10000
Luminous flux (Rated) (lm)	1500
Watt (Nominal) (W)	25
Voltage (V)	84

Aquastar T8

F25W/30/Aquastar

0002226

DATA TABLE

General data

Ordering number	0002226
Average life (Nominal) (h)	10000
Lamp shape	Tubular
Lamp finish	Coated
Dimmable	Yes
Cap/Base	G13
Type	AquaStar
EAN code	5410288022260
E-number SE	8356652
Long description	Light colour: 10000 Kelvin (simulating the tropical light spectrum). Promotes the growth of coral and aquatic plants through natural red and blue sections of the light spectrum. Excellent lighting performance. Applications. For all biological organisms in fresh and marine water aquariums
Product name	F25W/30/Aquastar
Lamp mercury content (mg)	10
Control gear required	Yes
Fixture rating	Open
IEC Reference	IEC 60081
IEC Reference 2	IEC 61195
Special purpose lamp	Yes
Transformer required	No
Sales pack quantity	25

Optical data

Colour temperature (K)	10000
Luminous flux (Rated) (lm)	1500
Luminous flux (Nominal) (lm)	1500

Electrical data

Watt (Rated) (W)	25
Watt (Nominal) (W)	25
Voltage (V)	84
Current (A)	0.36

Aquastar T8

F25W/30/Aquastar

0002226

Physical data


Weight (kg)	0.10
Length base to base (mm) - A	742.2
Length base to pin Min-Max - B	746.9-749.3
Lamp Length (mm) - C/L	756.4
Lamp Diameter (mm) - D	26
Packaging outer length (cm)	78.50
Packaging outer height (cm)	15.00
Packaging outer width (cm)	15.50
Packaging single width (cm)	2.90
Packaging single length (cm)	75.70
Packaging single height (cm)	2.80

Aquastar T8

F25W/30/Aquastar

0002226

PHOTOMETRY

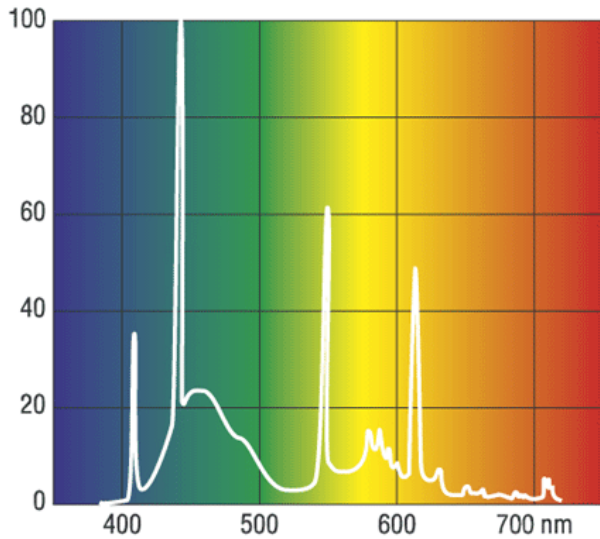

CRI (Ra) = 48
Tc = 10000K

TECHNICAL DRAWINGS

